

RA-AC12025

AC AXIAL FAN



CFM 47 ~ 66
120*120*25mm

Frame/Blade

- Frame:ADC12
- Blade:PBT

Features

- Power Supply:110/220V 50/60Hz Customizable
- Rotation:Anticlockwise when facing label
- Operating:Continuous
- Bearings:Ball/oil/Sleeve
- Connection Method:AWG22 specification wire
- Insulation Class:Class B
- Motor:RUIAPPLE Brushless (BLDC)
- Insulation Resistance:10M/500V DC
- Voltage Strength:2 minutes/1800AVC - 5mA
- Humidity Range:RH 20% - RH 75%
- Storage Temperature:- 20°C to +75°C
- Operating Temperature:-10°C to +70°
- Maximum:50,000hours


Certification



Options

- Maximum IP: 67
- Lock (stall) protection

Brand	RUIAPPLE/瑞安普
English	https://www.ruiapple-fan.com/Ac-Axial-Fans/AC-12025.html
Chinese	https://www.ruiapple-fan.cn/Ac-Axial-Fans/AC-12025.html

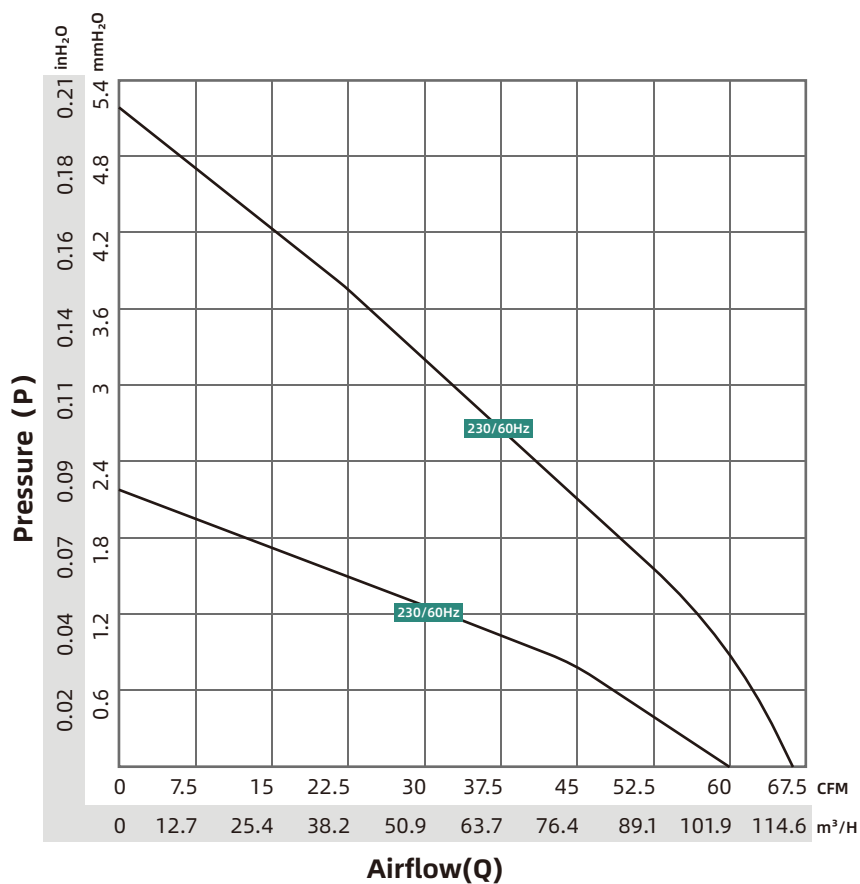

RA-AC12025

Model	P-Q	Frequency	Current	Power	Speed	Noise	Air Flow	Air Flow	Pressure
No.	V	Hz	A	W	RPM	dBA	CFM	M ³ /H	mm-H ₂ O
RA-AC12025Mx120	120	50	0.05	10	1800	30	47	80	1.8
RA-AC12025Mx230	230	50	0.10						
RA-AC12025Mx120	120	60	0.05	12	2400	35	60	101	2.0
RA-AC12025Mx230	230	60	0.10						
RA-AC12025Hx120	120	50	0.05	15	2300	35	58	98	3.8
RA-AC12025Hx230	230	50	0.08						
RA-AC12025Hx120	120	60	0.05	17	2700	37	66	112	5.0
RA-AC12025Hx230	230	60	0.08						

Model, (x) represents that the bearing is either a ball bearing (B) or Sleeve bearing (S), depending on customer requirements. For any customized design requirements for the mentioned products, please contact Ruiapple sales. For the latest product information, refer to announcements on the official Ruiapple website at www.ruiapple-fan.com.

Drawing

