

RA-DC8020

DC BRUSHLESS AXIAL FAN

CFM 15.2 ~ 51.2
80*80*20mm



Brand	RUIAPPLE/瑞安普
English	https://www.ruiapple-fan.com/DC-axial-fans/DC-8020.html
Chinese	https://www.ruiapple-fan.cn/DC-axial-fans/DC-8020.html

Frame/Blade

- Frame:PBT
- Blade:PBT

Features


- Power Supply:5/12/24V Customizable
- Rotation:Clockwise when facing label
- Operating:Continuous
- Bearings:Ball/oil/Sleeve
- Connection Method:AWG24 specification wire
- Insulation Class:Class B
- Motor:RUIAPPLE Brushless (BLDC)
- Insulation Resistance:10M/500V DC
- Voltage Strength:2 minutes/500AVC - 5mA
- Humidity Range:RH 20% - RH 75%
- Storage Temperature:- 20°C to +75°C
- Operating Temperature:-10°C to +70°
- Maximum:50,000hours

Certification



Options

- Normal/Fault alarm
- Closed-Loop
- Intermittent operation
- PWM speed control
- Lock (stall) protection
- Moisture Protection
- Connector add
- Soft/Delayed start
- Speed limit alarm
- Temperature start/stop
- Voltage speed control
- Reverse protection
- Maximum IP: 67

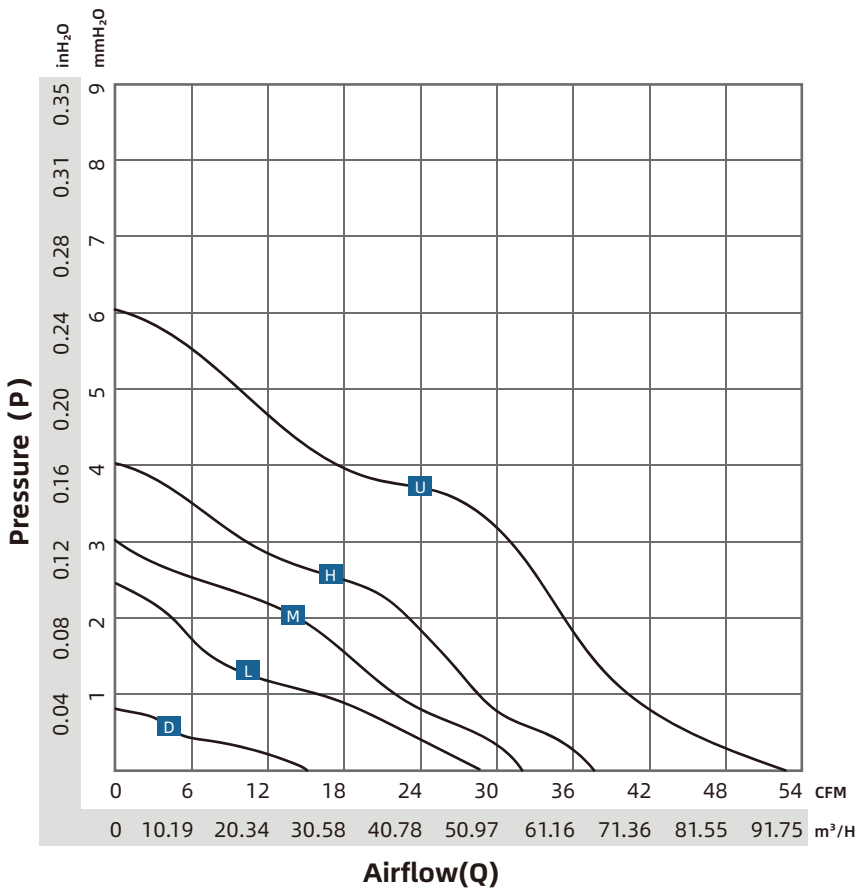

RA-DC8020

Model	P-Q	Voltage	Current	Power	Speed	Noise	Air Flow	Air Flow	Pressure
No.	P-Q Curve	V	A	W	RPM	dBA	CFM	M ³ /H	mm-H ₂ O
RA-DC8020Dx12	D	12	0.04	0.48	1500	20.7	15.20	25.82	0.83
RA-DC8020Dx24		24	0.06	1.44	1500				
RA-DC8020Lx12	L	12	0.08	0.96	2500	29.5	28.00	47.57	2.41
RA-DC8020Lx24		24	0.05	1.20	2500				
RA-DC8020Mx12	M	12	0.12	1.44	3000	35.1	32.50	55.22	3.03
RA-DC8020Mx24		24	0.08	1.92	3000				
RA-DC8020Hx12	H	12	0.20	2.04	3500	38.8	38.00	64.56	4.02
RA-DC8020Hx24		24	0.10	2.40	3500				
RA-DC8020Ux12	U	12	0.38	4.56	4500	45.2	51.20	86.99	6.06
RA-DC8020Ux24		24	0.20	4.80	4500				

Model, (x) represents that the bearing is either a ball bearing (B) or Sleeve bearing (S), depending on customer requirements. For any customized design requirements for the mentioned products, please contact Ruiapple sales. For the latest product information, refer to announcements on the official Ruiapple website at www.ruiapple-fan.com.

Drawing

