

RA-DB4010

DC BRUSHLESS BLOWER



CFM 1.3 ~ 2.4
40*40*10mm

Frame/Blade

- Frame:PBT
- Blade:PBT

Features

- Power Supply:12/24V Customizable
- Rotation:anticlockwise when facing label
- Operating:Continuous
- Bearings:Ball/oil/Sleeve
- Connection Method:AWG24 specification wire
- Insulation Class:Class B
- Motor:RUIAPPLE Brushless (BLDC)
- Insulation Resistance:10M/500V DC
- Voltage Strength:2 minutes/500AVC - 5mA
- Humidity Range:RH 20% - RH 75%
- Storage Temperature:- 20°C to +75°C
- Operating Temperature:-10°C to +70°
- Maximum:50,000hours


Certification



Options

- PWM speed control
- Voltage speed control
- Intermittent operation
- Temperature start/stop
- Speed limit alarm
- Closed-Loop
- Maximum IP: 68
- Constant Power
- Reverse protection
- Soft/Delayed start
- Lock (stall) protection
- Intermittent Start
- Normal/Fault alarm
- Feedback Signal
- Explosion Proof

Brand	RUIAPPLE/瑞安普
English	https://www.ruiapple-fan.com/Dc-Blower-Fans/DB-4010.html
Chinese	https://www.ruiapple-fan.cn/Dc-Blower-Fans/DB-4010.html

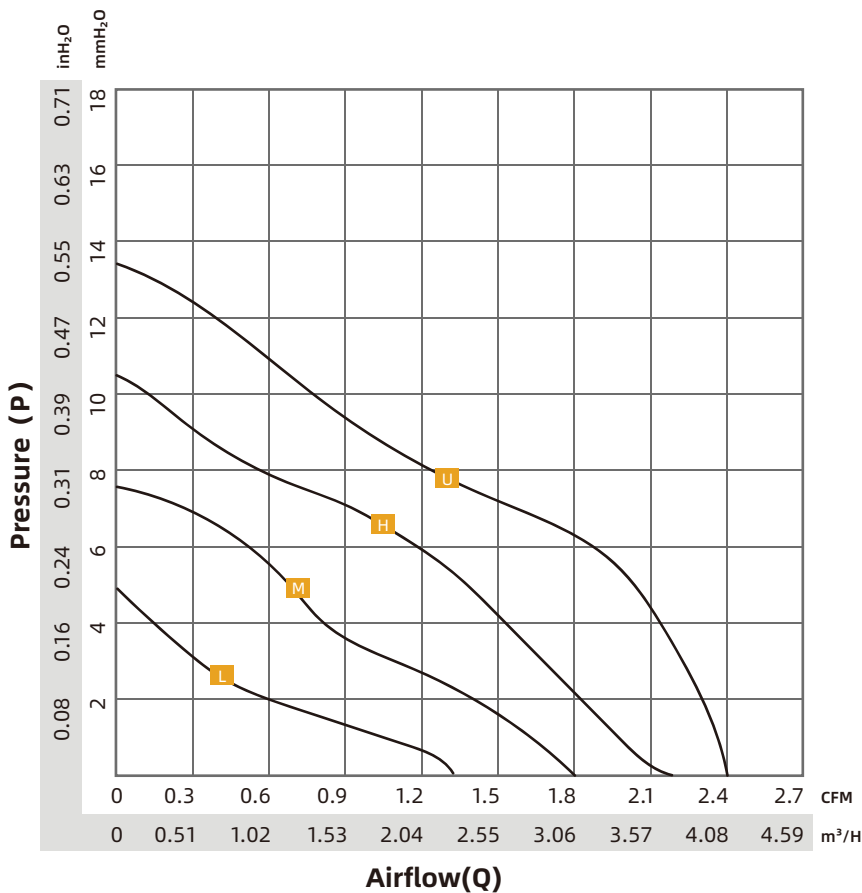

RA-DB4010

Model	P-Q	Voltage	Current	Power	Speed	Noise	Air Flow	Air Flow	Pressure
No.	P-Q Curve	V	A	W	RPM	dBA	CFM	M ³ /H	mm-H ₂ O
RA-DB4010Lx5	L	5	0.14	0.70	6000	27.4	1.30	2.20	4.55
RA-DB4010Lx12		12	0.06	0.72	6000				
RA-DB4010Mx5	M	5	0.20	1.00	7000	30.7	1.80	3.10	7.79
RA-DB4010Mx12		12	0.07	0.84	7000				
RA-DB4010Mx24		24	0.06	1.44	7000				
RA-DB4010Hx5	H	5	0.26	1.30	8000	33.9	2.20	3.70	10.46
RA-DB4010Hx12		12	0.12	1.44	8000				
RA-DB4010Hx24		24	0.07	1.68	8000				
RA-DB4010Ux12	U	12	0.16	1.92	9000	36.8	2.40	4.10	13.68
RA-DB4010Ux24		24	0.09	2.16	9000				

Model, (x) represents that the bearing is either a ball bearing (B) or Sleeve bearing (S), depending on customer requirements. For any customized design requirements for the mentioned products, please contact Ruiapple sales. For the latest product information, refer to announcements on the official Ruiapple website at www.ruiapple-fan.com.

Drawing

