

RA-AC9225

AC AXIAL FAN



CFM 21 ~ 29
92*92*25mm

Frame/Blade

- Frame:ADC12
- Blade:PBT

Features

- Power Supply:110/220V 50/60Hz Customizable
- Rotation:Anticlockwise when facing label
- Operating:Continuous
- Bearings:Ball/oil/Sleeve
- Connection Method:AWG22 specification wire
- Insulation Class:Class B
- Motor:RUIAPPLE Brushless (BLDC)
- Insulation Resistance:10M/500V DC
- Voltage Strength:2 minutes/1800AVC - 5mA
- Humidity Range:RH 20% - RH 75%
- Storage Temperature:- 20°C to +75°C
- Operating Temperature:-10°C to +70°
- Maximum:50,000hours


Certification



Options

- Maximum IP: 67
- Lock (stall) protection

Brand	RUIAPPLE/瑞安普
English	https://www.ruiapple-fan.com/Ac-Axial-Fans/AC-9225.html
Chinese	https://www.ruiapple-fan.cn/Ac-Axial-Fans/AC-9225.html

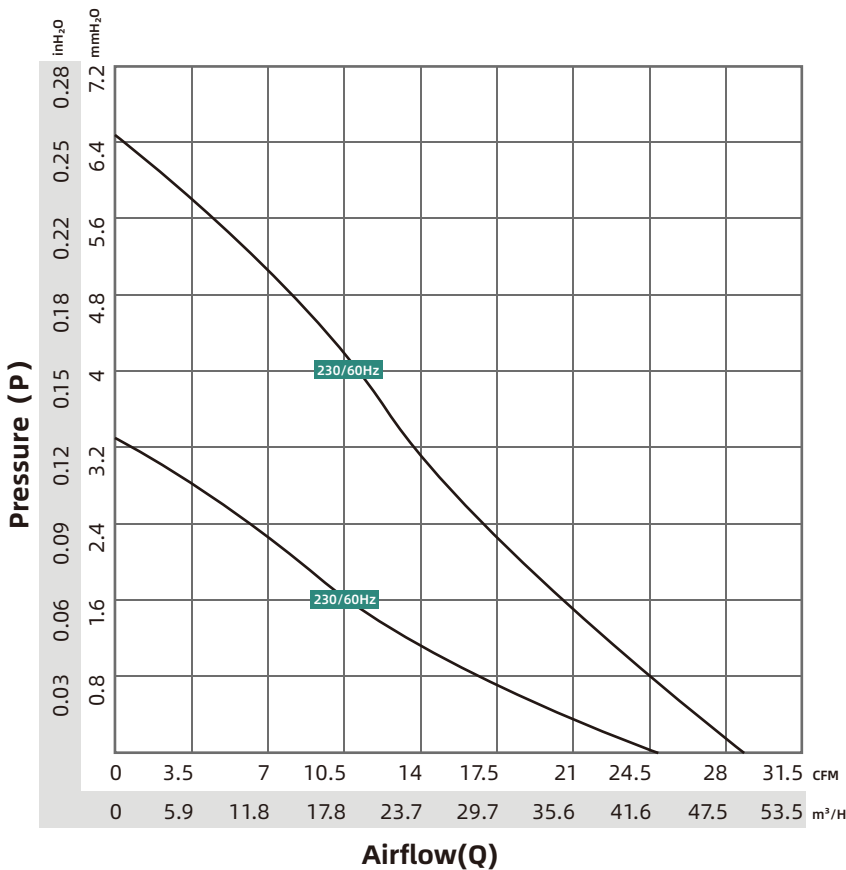

RA-AC9225

Model No.	P-Q V	Frequency Hz	Current A	Power W	Speed RPM	Noise dBA	Air Flow CFM	Air Flow M ³ /H	Pressure mm-H ₂ O
RA-AC9225Mx120	120	50	0.10	10	2200	29	21	35	3.0
RA-AC9225Mx230	230	50	0.15						
RA-AC9225Mx120	120	60	0.10	13	2600	33	25	42	3.3
RA-AC9225Mx230	230	60	0.15						
RA-AC9225Hx120	120	50	0.05	15	2500	33	24	41	4.5
RA-AC9225Hx230	230	50	0.08						
RA-AC9225Hx120	120	60	0.05	17	3000	35	29	49	6.5
RA-AC9225Hx230	230	60	0.08						

Model, (x) represents that the bearing is either a ball bearing (B) or Sleeve bearing (S), depending on customer requirements. For any customized design requirements for the mentioned products, please contact Ruiapple sales. For the latest product information, refer to announcements on the official Ruiapple website at www.ruiapple-fan.com.

Drawing

