

# RA-AC17251

## AC AXIAL FAN



CFM 137 ~ 196  
172\*150\*51mm

### Frame/Blade

- Frame:ADC12
- Blade:PBT

### Features

- Power Supply:110/220V 50/60Hz Customizable
- Rotation:Anticlockwise when facing label
- Operating:Continuous
- Bearings:Ball/oil/Sleeve
- Connection Method:AWG22 specification wire
- Insulation Class:Class B
- Motor:RUIAPPLE Brushless (BLDC)
- Insulation Resistance:10M/500V DC
- Voltage Strength:2 minutes/1800AVC - 5mA
- Humidity Range:RH 20% - RH 75%
- Storage Temperature:- 20°C to +75°C
- Operating Temperature:-10°C to +70°
- Maximum:50,000hours


### Certification



### Options

- Maximum IP: 67
- Lock (stall) protection

Brand	RUIAPPLE/瑞安普
English	<a href="https://www.ruiapple-fan.com/AC-Axial-Fans/AC-17251.html">https://www.ruiapple-fan.com/AC-Axial-Fans/AC-17251.html</a>
Chinese	<a href="https://www.ruiapple-fan.cn/AC-Axial-Fans/AC-17251.html">https://www.ruiapple-fan.cn/AC-Axial-Fans/AC-17251.html</a>

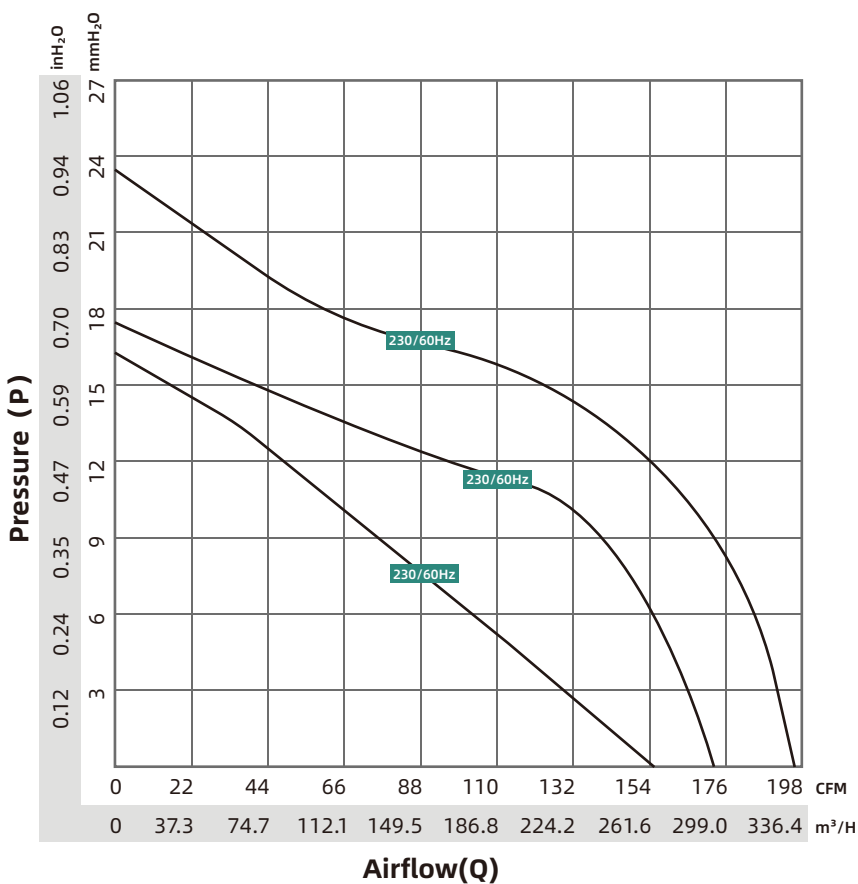

# RA-AC17251

Model No.	P-Q V	Frequency Hz	Current A	Power W	Speed RPM	Noise dBA	Air Flow CFM	Air Flow M <sup>3</sup> /H	Pressure mm-H <sub>2</sub> O
RA-AC17251Lx120	120	50	0.12	20	2100	39	137	233	12.4
RA-AC12038Lx230	230	50	0.15						
RA-AC17251Lx120	120	60	0.12	21	2400	45	155	263	16.6
RA-AC17251Lx230	230	60	0.15						
RA-AC17251Mx120	120	50	0.23	27	2400	39	155	263	16.6
RA-AC17251Mx230	230	50	0.30						
RA-AC17251Mx120	120	60	0.23	28	2600	42	170	289	17.2
RA-AC17251Mx230	230	60	0.30						
RA-AC17251Hx120	120	50	0.13	36	2600	49	170	289	17.2
RA-AC17251Hx230	230	50	0.45						
RA-AC17251Hx120	120	60	0.13	38	3000	56	196	333	23
RA-AC17251Hx230	230	60	0.45						

Model, (x) represents that the bearing is either a ball bearing (B) or Sleeve bearing (S), depending on customer requirements. For any customized design requirements for the mentioned products, please contact Ruiapple sales. For the latest product information, refer to announcements on the official Ruiapple website at [www.ruiapple-fan.com](http://www.ruiapple-fan.com).

## Drawing

