

RA-EC9225

EC FAN



CFM 56.3~70.1
92*92*25mm

Frame/Blade

- Frame:PBT
- Blade:PBT

Features

- Power Supply:110/220VAC 50/60Hz Customizable
- Rotation:anticlockwise when facing label
- Operating:Continuous
- Bearings:Ball/oil/Sleeve
- Connection Method:AWG24 specification wire
- Insulation Class:Class B
- Motor:RUIAPPLE Brushless (BLDC)
- Insulation Resistance:10M/500V DC
- Voltage Strength:2 minutes/500AVC - 5mA
- Humidity Range:RH 20% - RH 75%
- Storage Temperature:- 20°C to +75°C
- Operating Temperature:-10°C to +70°
- Maximum:50,000hours


Certification



Options

- Maximum IP: 68
- Lock (stall) protection

| | |
|---------|---|
| Brand | RUIAPPLE/瑞安普 |
| English | https://www.ruiapple-fan.com/Ec-Fans/EC-9225.html |
| Chinese | https://www.ruiapple-fan.cn/Ec-Fans/EC-9225.html |

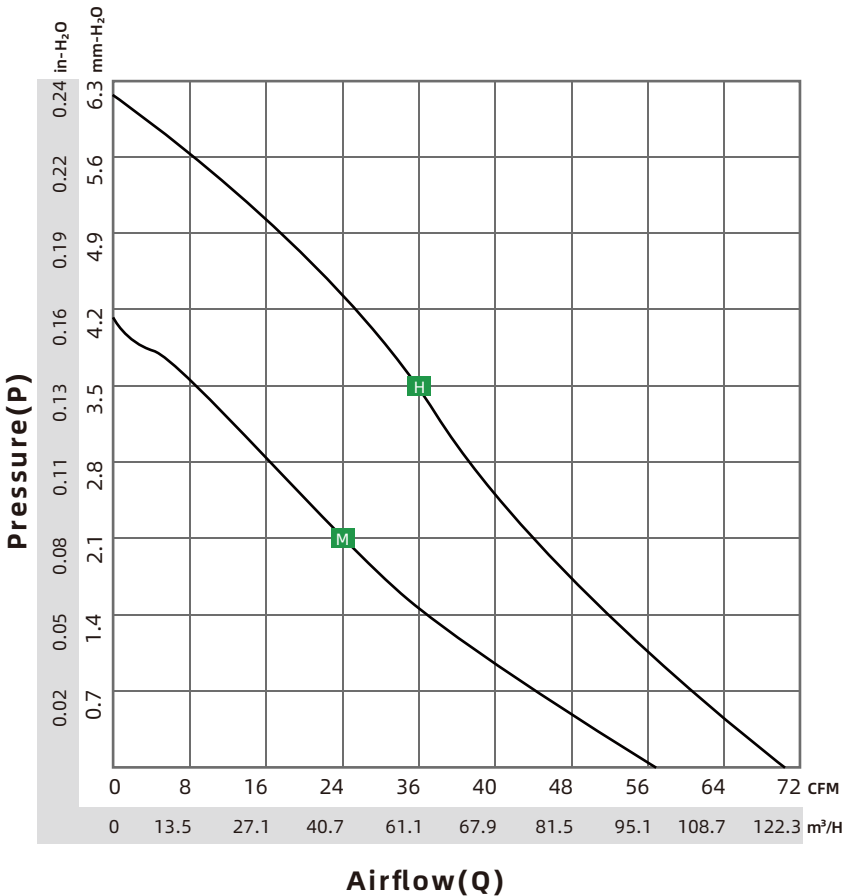

RA-EC9225

| Model | P-Q | Voltage | Current | Power | Speed | Noise | Air Flow | Air Flow | Pressure |
|----------------|-----------|---------|---------|-------|-------|-------|----------|-------------------|---------------------|
| Model | P-Q Curve | V | A | W | RPM | dBA | CFM | M ³ /H | mm-H ₂ O |
| RA-EC9225Mx220 | M | 220 | 0.04 | 3.00 | 3000 | 37 | 56.30 | 95.65 | 4.10 |
| RA-EC9225Hx220 | H | 220 | 0.08 | 4.80 | 3800 | 42 | 70.10 | 119.10 | 6.20 |

Model, (x) represents that the bearing is either a ball bearing (B) or Sleeve bearing (S), depending on customer requirements. For any customized design requirements for the mentioned products, please contact Ruiapple sales. For the latest product information, refer to announcements on the official Ruiapple website at www.ruiapple-fan.com.

Drawing

