

RA-AC12038

AC AXIAL FAN



CFM 66 ~ 91
120*120*38mm

Frame/Blade

- Frame:ADC12
- Blade:PBT

Features

- Power Supply:110/220V 50/60Hz Customizable
- Rotation:Anticlockwise when facing label
- Operating:Continuous
- Bearings:Ball/oil/Sleeve
- Connection Method:AWG22 specification wire
- Insulation Class:Class B
- Motor:RUIAPPLE Brushless (BLDC)
- Insulation Resistance:10M/500V DC
- Voltage Strength:2 minutes/1800AVC - 5mA
- Humidity Range:RH 20% - RH 75%
- Storage Temperature:- 20°C to +75°C
- Operating Temperature:-10°C to +70°
- Maximum:50,000hours


Certification



Options

- Maximum IP: 67
- Lock (stall) protection

Brand	RUIAPPLE/瑞安普
English	https://www.ruiapple-fan.com/Ac-Axial-Fans/AC-12038.html
Chinese	https://www.ruiapple-fan.cn/Ac-Axial-Fans/AC-12038.html

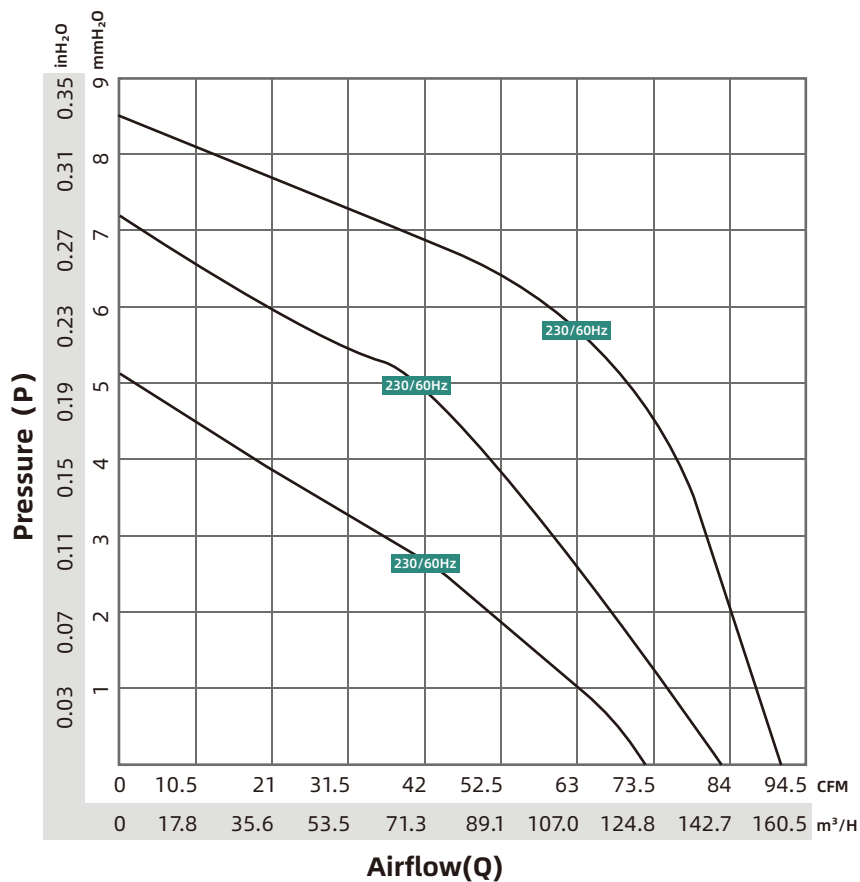

RA-AC12038

Model	P-Q	Frequency	Current	Power	Speed	Noise	Air Flow	Air Flow	Pressure
No.	V	Hz	A	W	RPM	dBA	CFM	M ³ /H	mm-H ₂ O
RA-AC12038Lx120	120	50	0.07	9	2100	35	66	112	3.2
RA-AC12038Lx230	230	50	0.12						
RA-AC12038Lx120	120	60	0.07	10	2400	39	72	122	5.1
RA-AC12038Lx230	230	60	0.12						
RA-AC12038Mx120	120	50	0.10	14	2400	39	72	122	5.1
RA-AC12038Mx230	230	50	0.18						
RA-AC12038Mx120	120	60	0.10	15	2700	42	83	141	6.8
RA-AC12038Mx230	230	60	0.18						
RA-AC12038Hx120	120	50	0.14	21	2600	42	80	135	6.8
RA-AC12038Hx230	230	50	0.22						
RA-AC12038Hx120	120	60	0.14	23	3000	46	91	154	8.5
RA-AC12038Hx230	230	60	0.22						

Model, (x) represents that the bearing is either a ball bearing (B) or Sleeve bearing (S), depending on customer requirements. For any customized design requirements for the mentioned products, please contact Ruiapple sales. For the latest product information, refer to announcements on the official Ruiapple website at www.ruiapple-fan.com.

Drawing

