

RA-AC20060

AC AXIAL FAN



CFM 420
200*60mm

Frame/Blade

- Frame:ADC12
- Blade:PBT

Features

- Power Supply:110/220V 50/60Hz Customizable
- Rotation:Anticlockwise when facing label
- Operating:Continuous
- Bearings:Ball/oil/Sleeve
- Connection Method:AWG22 specification wire
- Insulation Class:Class B
- Motor:RUIAPPLE Brushless (BLDC)
- Insulation Resistance:10M/500V DC
- Voltage Strength:2 minutes/1800AVC - 5mA
- Humidity Range:RH 20% - RH 75%
- Storage Temperature:- 20°C to +75°C
- Operating Temperature:-10°C to +70°
- Maximum:50,000hours


Certification



Options

- Maximum IP: 67
- Lock (stall) protection

Brand	RUIAPPLE/瑞安普
English	https://www.ruiapple-fan.com/Ac-Axial-Fans/AC-20060.html
Chinese	https://www.ruiapple-fan.cn/Ac-Axial-Fans/AC-20060.html

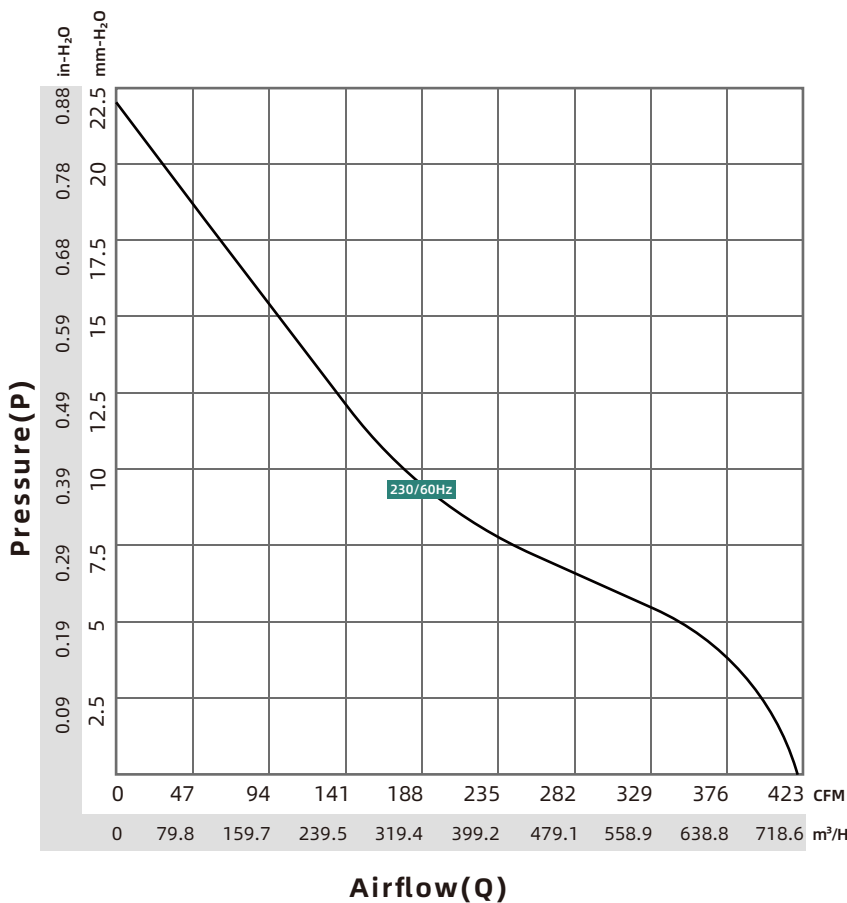

RA-AC20060

Model	Frequency	P-Q	Current	Power	Speed	Noise	Air Flow	Air Flow	Pressure
No.	Hz	V	A	W	RPM	dBA	CFM	M ³ /H	mm-H ₂ O
RA-AC20060Hx230	60	230	0.45	65	2700	54	420	713	22

Model, (x) represents that the bearing is either a ball bearing (B) or Sleeve bearing (S), depending on customer requirements. For any customized design requirements for the mentioned products, please contact Ruiapple sales. For the latest product information, refer to announcements on the official Ruiapple website at www.ruiapple-fan.com.

Drawing

