

# RA-AC11025

## AC AXIAL FAN



**CFM 30 ~ 45**  
**110\*110\*25mm**

### Frame/Blade

- Frame:ADC12
- Blade:PBT

### Features

- Power Supply:110/220V 50/60Hz Customizable
- Rotation:Anticlockwise when facing label
- Operating:Continuous
- Bearings:Ball/oil/Sleeve
- Connection Method:AWG22 specification wire
- Insulation Class:Class B
- Motor:RUIAPPLE Brushless (BLDC)
- Insulation Resistance:10M/500V DC
- Voltage Strength:2 minutes/1800AVC - 5mA
- Humidity Range:RH 20% - RH 75%
- Storage Temperature:- 20°C to +75°C
- Operating Temperature:-10°C to +70°
- Maximum:50,000hours


### Certification



### Options

- Maximum IP: 67
- Lock (stall) protection

Brand	RUIAPPLE/瑞安普
English	<a href="https://www.ruiapple-fan.com/Ac-Axial-Fans/AC-11025.html">https://www.ruiapple-fan.com/Ac-Axial-Fans/AC-11025.html</a>
Chinese	<a href="https://www.ruiapple-fan.cn/Ac-Axial-Fans/AC-11025.html">https://www.ruiapple-fan.cn/Ac-Axial-Fans/AC-11025.html</a>

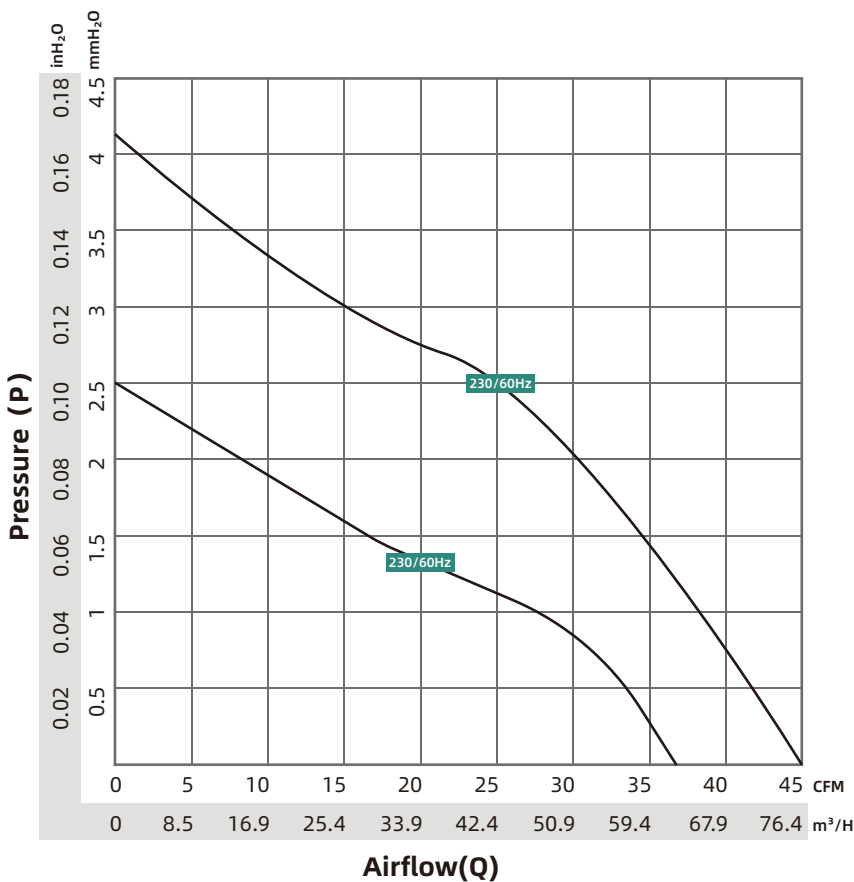

# RA-AC11025

Model No.	P-Q V	Frequency Hz	Current A	Power W	Speed RPM	Noise dBA	Air Flow CFM	Air Flow M <sup>3</sup> /H	Pressure mm-H <sub>2</sub> O
RA-AC11025Mx120	120	50	0.10	10	1800	30	30	51	2.2
RA-AC11025Mx230	230	50	0.15						
RA-AC11025Hx120	120	60	0.10	12	2400	35	37	63	2.5
RA-AC11025Hx230	230	60	0.15						
RA-AC11025Hx120	120	50	0.05	15	2300	35	39	66	3.9
RA-AC11025Hx230	230	50	0.08						
RA-AC11025Hx120	120	60	0.05	17	2700	37	45	76	4.1
RA-AC11025Hx230	230	60	0.08						

Model, (x) represents that the bearing is either a ball bearing (B) or Sleeve bearing (S), depending on customer requirements. For any customized design requirements for the mentioned products, please contact Ruiapple sales. For the latest product information, refer to announcements on the official Ruiapple website at [www.ruiapple-fan.com](http://www.ruiapple-fan.com).

## Drawing

