

# RA-EC6025

## EC FAN



**CFM 15.3~26.5**  
**60\*60\*25mm**

### Frame/Blade

- Frame:PBT
- Blade:PBT

### Features

- Power Supply:110/220VAC 50/60Hz Customizable
- Rotation:anticlockwise when facing label
- Operating:Continuous
- Bearings:Ball/oil/Sleeve
- Connection Method:AWG24 specification wire
- Insulation Class:Class B
- Motor:RUIAPPLE Brushless (BLDC)
- Insulation Resistance:10M/500V DC
- Voltage Strength:2 minutes/500AVC - 5mA
- Humidity Range:RH 20% - RH 75%
- Storage Temperature:- 20°C to +75°C
- Operating Temperature:-10°C to +70°
- Maximum:50,000hours


### Certification



### Options

- Maximum IP: 68
- Lock (stall) protection

Brand	RUIAPPLE/瑞安普
English	<a href="https://www.ruiapple-fan.com/Ec-Fans/EC-6025.html">https://www.ruiapple-fan.com/Ec-Fans/EC-6025.html</a>
Chinese	<a href="https://www.ruiapple-fan.cn/Ec-Fans/EC-6025.html">https://www.ruiapple-fan.cn/Ec-Fans/EC-6025.html</a>

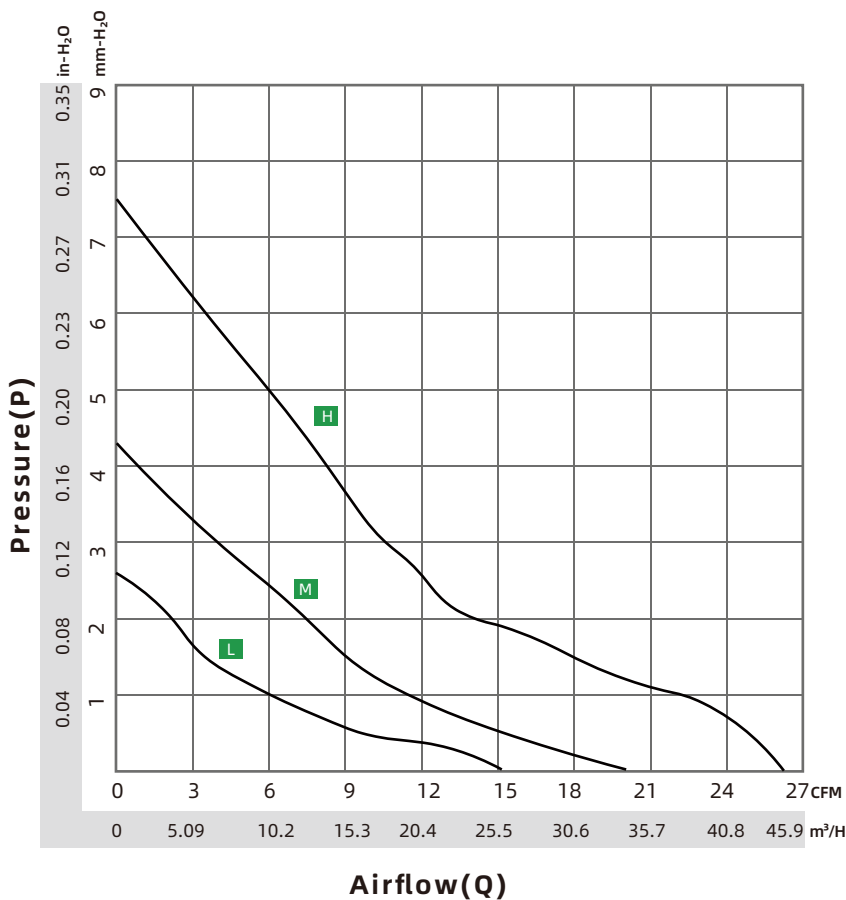

# RA-EC6025

Model	P-Q	Voltage	Current	Power	Speed	Noise	Air Flow	Air Flow	Pressure
Model	P-Q Curve	V	A	W	RPM	dBA	CFM	M <sup>3</sup> /H	mm-H <sub>2</sub> O
RA-EC6025Lx220	L	220	*	1.00	3000	24	15.30	25.99	2.50
RA-EC6025Mx220	M	220	*	2.00	4000	32	19.8	33.7	4.3
RA-EC6025Hx220	H	220	*	3.00	5500	38.5	26.5	45	7.56

Model, (x) represents that the bearing is either a ball bearing (B) or Sleeve bearing (S), depending on customer requirements. For any customized design requirements for the mentioned products, please contact Ruiapple sales. For the latest product information, refer to announcements on the official Ruiapple website at [www.ruiapple-fan.com](http://www.ruiapple-fan.com).

## Drawing

